



## LFNE5B (FRONT LOADING WASHER), LDEE5B (ELECTRIC DRYER), LDGE5B (GAS DRYER)

### Front Loading Washer Features

- Improved suspension with new out-of-balance logic manages and redistributes unbalanced loads for uninterrupted wash cycles
- High spin speed up to 440 G-Force removes more water from clothes, speeding up drying cycles and lowering dryer energy usage
- A pump drain allows our front load washers to be installed adjacent to or replace top load washers with no special plumbing

### Single dryer features

- Durable galvanized steel cylinder with an extra-large 198 litres of volume
- Efficient dryer heating with 5,000 kCal (gas models) and up to 4,000 Watts (electric models)
- Large, easy-to-clean lint compartment
- Reversible door
- 1913.8 sq. cm door opening is the largest in the industry, providing easy loading and unloading

### Controls

#### Front loading washer Electronic Control

The Electronic Control keeps users informed throughout the wash process with cycle status lights and a digital cycle countdown. Users also have the flexibility to control temperature, load type, and soil levels, as well as the option of a pre-wash and/or additional rinse to achieve high levels of efficiency.

#### Single dryer Electronic Control

The Electronic Control keeps users informed throughout the wash process with cycle status lights and a digital cycle countdown. Users also have the flexibility to control temperature, load type, and soil levels, as well as the option of a pre-wash and/or additional rinse to achieve high levels of efficiency.



LFNE5B

LDEE5B, LDGE5B



Large Door  
Opening



Low Water  
Consumption



Low Energy  
Consumption



Robust  
Design

# On-Premises Laundry

## Specifications


	LFNE5B	LDEE5B (Electric)	LDGE5B (Gas)
Type	Front Loading Washer	Single Dryer	Single Dryer
Control	Electronic	Electronic	Electronic
Control location	Front	Front	Front
DRUM			
Capacity kg	10	7 (Electric), 8.2 (Gas)	7 (Electric), 8.2 (Gas)
Cylinder volume litres	96.8	198	198
DRUM SPEED			
Spin speed G-Force	440	N/A	N/A
Spin speed rpm	1200	N/A	N/A
MOTOR			
Motor size kW	Variable speed induction 0.67	0.25	0.25
CABINET			
Cylinder finish	Stainless steel	Galvanized	Galvanized
Colours	White	White	White
Door type (solid/window)	Window	Solid	Solid
HEATING			
Heat sources	N/A	Gas or Electric	Gas or Electric
Heating element (Electric W)	N/A	4000	4000
CONNECTION			
Gas inlet connection mm	N/A	9.5	9.5
Gas consumption BTU/Hr	N/A	60 Hz: 22,500, 50 Hz: 20,000	60 Hz: 22,500, 50 Hz: 20,000
Exhaust outlet dia. mm	N/A	102	102
Exhaust airflow litres/sec	N/A	60 Hz: 105, 50 Hz: 85	60 Hz: 105, 50 Hz: 85
Water temperatures	3	N/A	N/A
OPERATION			
Cycles*	Heavy Duty, Normal Eco, Perm Press, Delicate, Rinse and Spin, Spin Only	Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up	Regular, Perm Press, Delicate, Time Dry, Quick Dry, Fluff Up
Water consumption per cycle litres*	44.3	N/A	N/A
Water pressure bar	1.4/8.3	N/A	N/A
Cycle indicator lights	Yes	Yes	Yes
POWER			
Electrical requirements (voltage/Hz/Ph)	240/50/1	240/50/1 (Electric)	240/50/1 (Electric)
TRANSPORT DATA			
Net weight kg	113	Electric/Gas 66/68	Electric/Gas 66/68
Shipping weight kg	122	Electric/Gas 70/73	Electric/Gas 70/73
Dimensions HxWxD mm	1027x683x704	1027x683x711	1027x683x711
Packing dimensions HxWxD mm	1156x737x832	1156x737x832	1156x737x832
AGENCY APPROVALS			
Available agency approvals	See price sheet for applicable agency approvals by market	See price sheet for applicable agency approvals by market	See price sheet for applicable agency approvals by market

\* Information provided applies to premier control offered by product class.


# On-Premises Laundry

## Dimensions


Front Loading Washer	A	B	C	D	E	F	G	H	I	J
LFNE5B	611	1027	813	1006	371	683	52	704	40	333

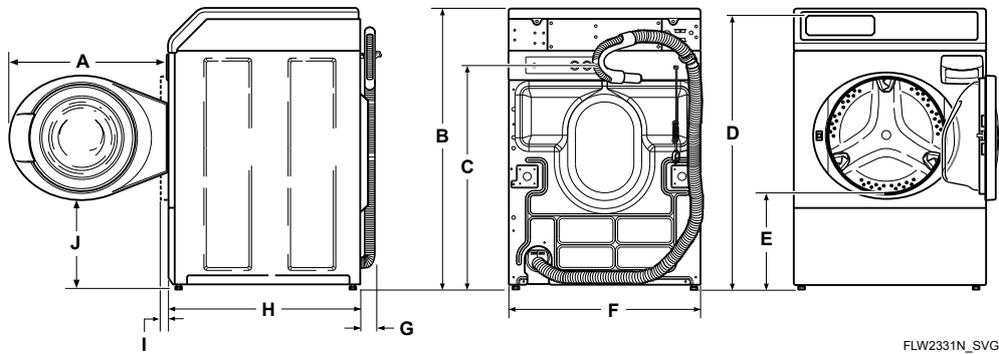

Electric Dryer	A	B	C	D	E	F	G	H	I	J	K
LDDE5B	1027*	1006*	392*	102*	391	683	114*	10	203	711	597

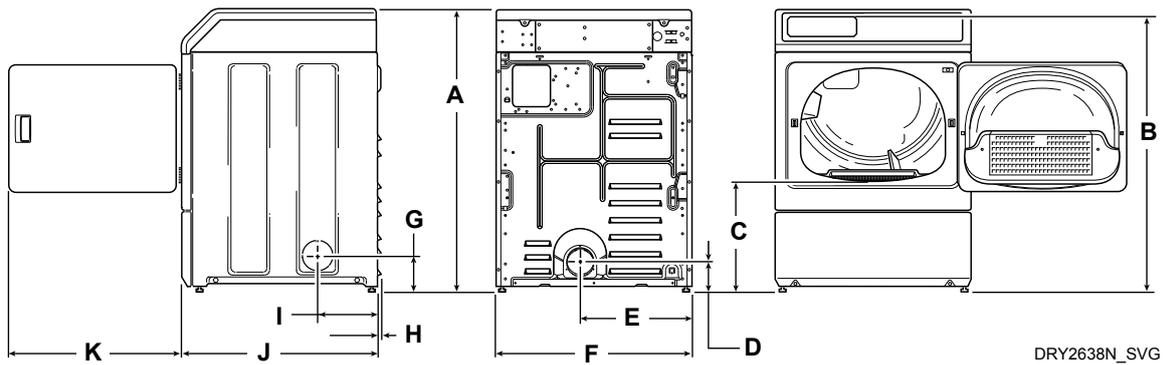

Gas Dryer	A	B	C	D	E	F	G	H	I	J	K	L	M
LDGE5B	1027*	1006*	392*	70*	60	391	683	102	114*	10	203	711	597

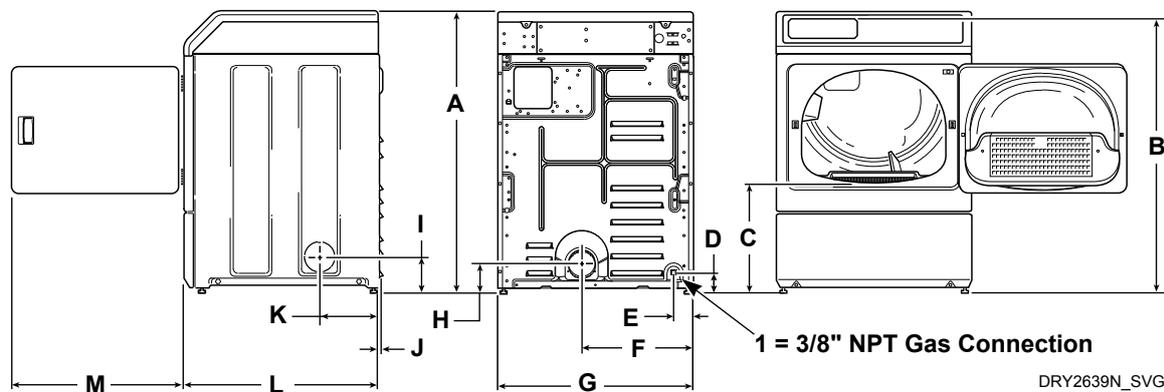

All measurements are in mm. \*With levelling legs turned into base.

NOTE: Exhaust openings are 102 mm metal ducting.

Gas models cannot be vented out left side of cabinet because of burner housing.

IMPORTANT: The dryer should have sufficient clearance around it for needed ventilation and for the ease of installation and servicing. For maximum drying performance, we recommend that more clearance be allowed around the dryer than the clearances that are listed throughout this manual.